

Lista de Corte

	Material	Referencia	Dimensión	Cantidad
1	MDF / Laminova Kipe, 15.0	CS 1 Techo	1500.0 × 560.0	1
2	MDF / Laminova Kipe, 15.0	CS 1 Suelo	1530.0 × 560.0	1
3	MDF / Laminova Kipe, 15.0	CS 1 Lateral [Derecho, Izquierdo]	2335.0 × 560.0	2
4	MDF / Laminova Kipe, 15.0	CS 1 Estante 1	1500.0 × 485.0	1
5	MDF / Laminova Kipe, 15.0	CS 1 Estante [2-5]	727.5 × 485.0	4
6	MDF / Laminova Kipe, 15.0	CS 1 Estante [6-9]	371.3 × 485.0	4
7	MDF / Laminova Kipe, 15.0	CS 1 [Montante 2, Montante1]	1960.0 × 485.0	2
8	MDF / Laminova Kipe, 15.0	CS 1 Trasera_[1-3]	2334.0 × 504.7	3
9	MDF / Laminova Kipe, 15.0	CS 1 Puerta Corredera_[1, 2]	2310.0 × 765.0	2
10	MDF / Laminova Kipe, 15.0	CS 1 Cajon (1,2,3)_[1-3]	218.0 × 721.5	3
11	MDF / Laminova Kipe, 15.0	CS 1 Cajon [D, I] Lado [1-3]	455.0 × 180.0	6
12	MDF / Laminova Kipe, 15.0	CS 1 Cajon Fondo [1-3]	687.5 × 455.0	3
13	MDF / Laminova Kipe, 15.0	CS 1 Cajon Trasera [1-3]	671.5 × 150.0	3
14	MDF / Laminova Kipe, 15.0	CS 1 Cajon Contra-Frente [1-3]	671.5 × 150.0	3
15	MDF / Laminova Kipe, 15.0	CS 1 Zocalo [Derecho, Izquierdo]	530.0 × 130.0	2
16	MDF / Laminova Kipe, 15.0	CS 1 Zocalo [Frontal, Trasera]	1470.0 × 130.0	2
TOTAL				42

Paneles Requeridos

Material	Dimensión	Cantidad	Superficie
MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	8	23.8 m ²

Lista de Esquemas de Corte

	Material	Dimensión	Cantidad	Piezas	% de Retales	Coste Neto
1	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	1	9	7.28 %	\$906.74
2	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	2	4	7.54 %	\$918.33
3	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	1	9	8.29 %	\$949.10
4	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	1	9	12.14 %	\$912.38
5	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	1	5	30.78 %	\$744.68
6	MDF / Laminova Kipe, 15.0	2436.0 × 1219.0	2	1	40.49 %	\$560.67
TOTAL			8	42	19.32 %	\$6,470.91


Recapitulación

Datos técnicos		Costes	
Número de Paneles requeridos	8	Coste de Piezas	\$5,481.56
Número de Esquemas de Corte	6	Coste de Paneles	\$6,794.18
Superficie Total de los Paneles	23.8 m ²	Coste de Retales	\$1,312.62
Superficie Total de las Piezas	19.2 m ²	Coste de Retales irrecuperables	\$450.73
% de Retales	19.32 %	Coste de la longitud de corte	\$538.61
% de Retales irrecuperables	6.63 %	Coste Neto Total	\$6,470.91
Longitud de Corte	67.33 m		
Longitud de Cintas	0.00 m		

1/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Ejemplar unico

1500.0 × 560.0 CS 1 Techo	1500.0 × 485.0 CS 1 Estante 1	671.5 × 150.0 CS 1 Caj...	
		671.5 × 150.0 CS 1 Caj...	
		151.0 × 150.0	
687.5 × 455.0 CS 1 Cajon Fondo [1-3]	687.5 × 455.0 CS 1 Cajon Fondo [1-3]	671.5 × 150.0 CS 1 Caj...	671.5 × 150.0 CS 1 Caj...
218.0 × 721.5 CS 1 Cajon (1,2,3)_[1-3]		218.0 × 494.5	

2/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Repetir 2 veces

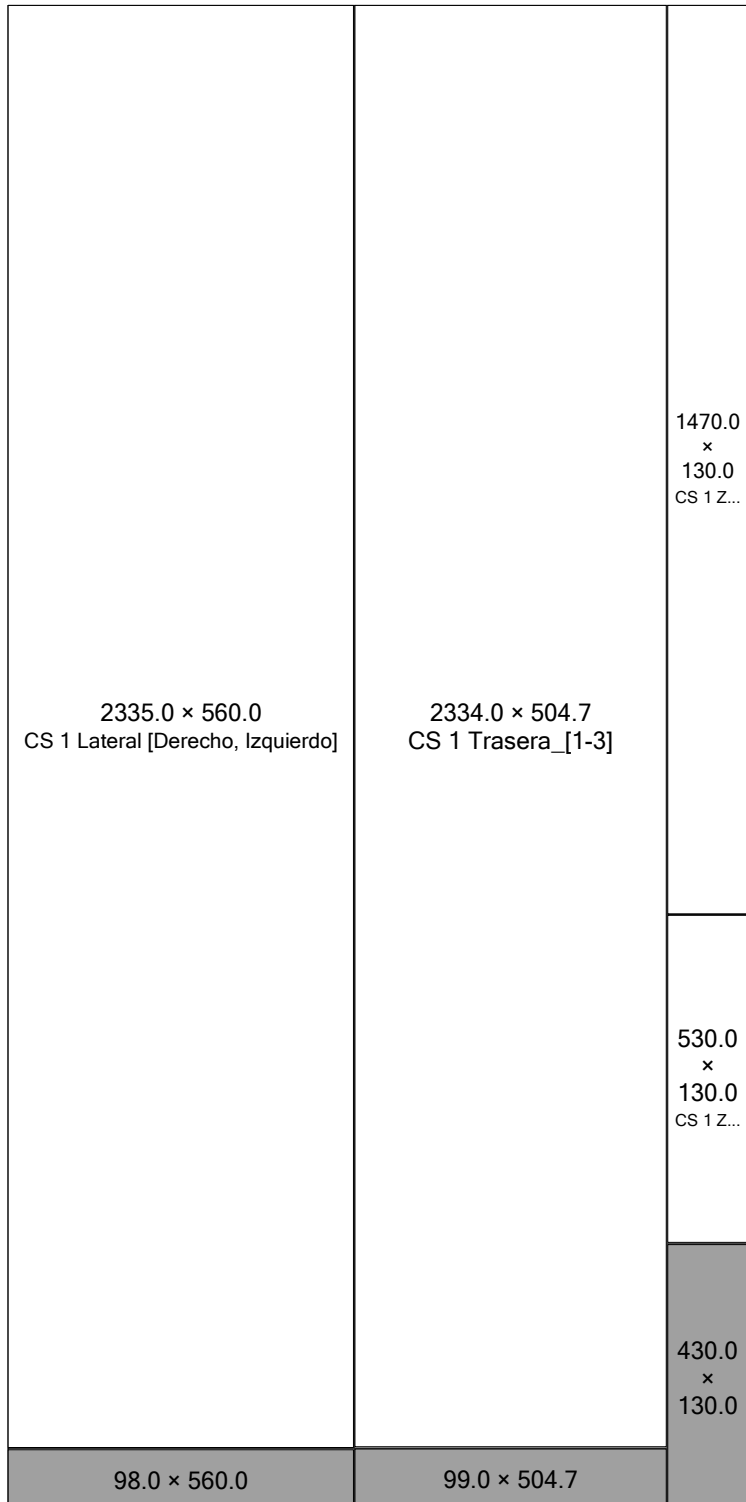


3/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Ejemplar unico

218.0 × 721.5 CS 1 Cajon (1,2,3)_[1-3]		
218.0 × 721.5 CS 1 Cajon (1,2,3)_[1-3]		
1960.0 × 485.0 CS 1 [Montante 2, Montante1]	455.0 × 180.0 CS 1 Cajon ...	1960.0 × 485.0 CS 1 [Montante 2, Montante1]
	455.0 × 180.0 CS 1 Cajon ...	
	455.0 × 180.0 CS 1 Cajon ...	
	455.0 × 180.0 CS 1 Cajon ...	
	162.0 × 180.0	371.3 × 485.0 CS 1 Estante [6-9]
	98.8 × 485.0	

4/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Ejemplar unico

2334.0 × 504.7 CS 1 Trasera_[1-3]	727.5 × 485.0 CS 1 Estante [2-5]	455.0 × 180.0 CS 1 Cajon ...
	727.5 × 485.0 CS 1 Estante [2-5]	455.0 × 180.0 CS 1 Cajon ...
	727.5 × 485.0 CS 1 Estante [2-5]	671.5 × 150.0 CS 1 Caj...
	371.3 × 485.0 CS 1 Estante [6-9]	671.5 × 150.0 CS 1 Caj...
	371.3 × 485.0 CS 1 Estante [6-9]	671.5 × 150.0 CS 1 Caj...
	226.5 × 485.0	171.0 × 180.0
99.0 × 504.7		

5/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Ejemplar unico

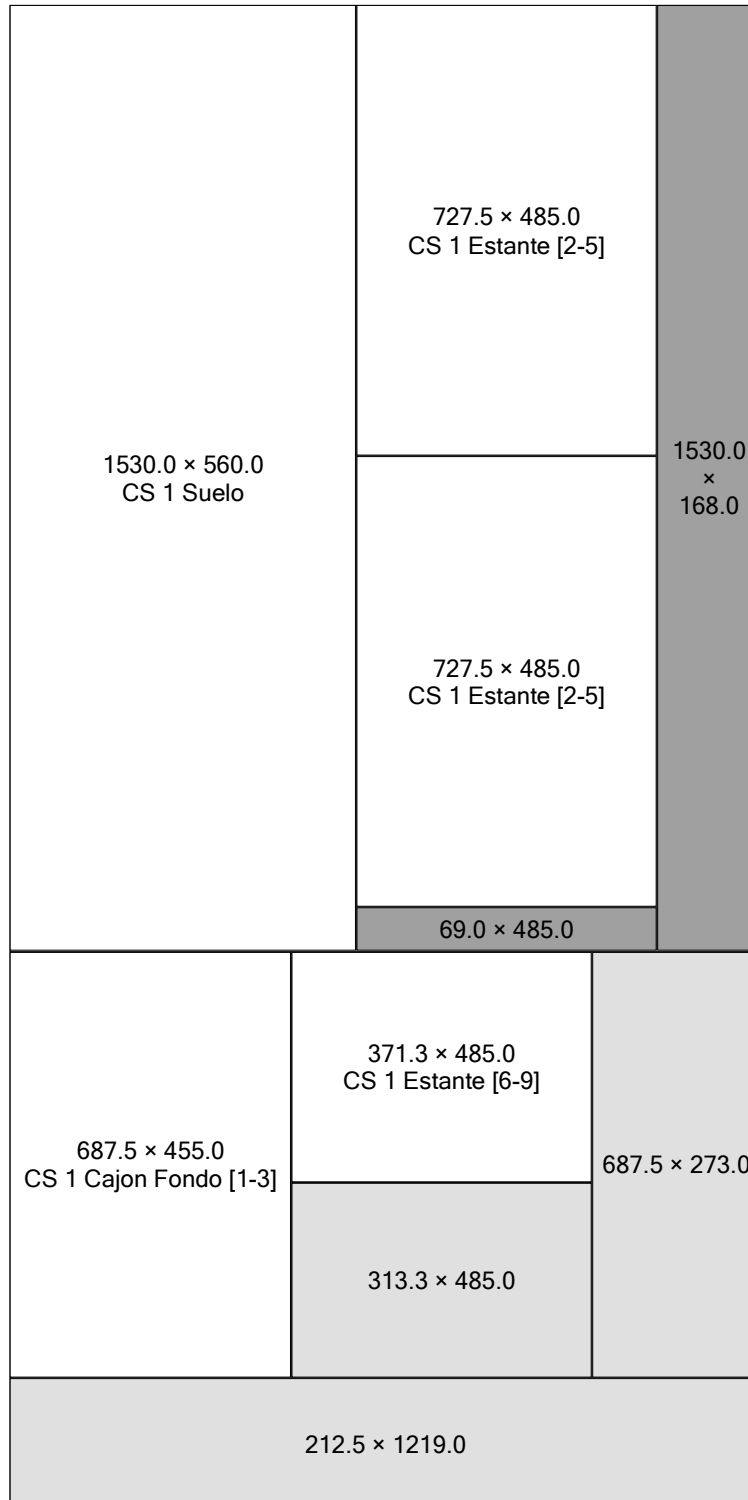

6/6 -- MDF / Laminova Kipe, 15.0 -- 2436.0 × 1219.0 -- Repetir 2 veces

